

VIOSO®

Anystation Pico




Playback Performance	
Max. recommended resolution per output	FullHD@60Hz
Max. content resolution (HAP playback)	1x UHD@30Hz
Form Factor	
General Design	ultra portable desktop chassis
Dimensions (WxHxD mm)	200 x 150 x 40 mm
Weight	1,7kg
Power Supply	external 65W
Application	
Warping & Blending	VIOSO 6 (export to Exaplay)
Auto Alignment	supported ¹
Desktop Resolution Adaption	-
Video Playback Solution	Exaplay
Operating System	Windows 11 Pro
Hardware	
CPU	Intel Core i3, 6 cores ,2 P-cores, 4 E-cores
RAM	16 GB
GPU	Intel® UHD Graphics Display Connectors: 1 x Displayport, 2x HDMI
Framelock / Genlock	-
HDD Primary	1 TB (OS+Data), 3 GB/s
HDD Secondary	-
Warranty	
Software	2 years software maintenance
Hardware	2 years bring-in warranty
Interfaces	
USB	Front: 1 x USB Type-C3.2 Gen2 (10 Gbps), 2 x USB3.2 Gen2 (10 Gbps), 2 x USB2.0 Rear: 2x USB 2.0, 2x USB 3.2
Ethernet	2x 1 GB/s
Wireless	Wireless LAN Intel® Wi-Fi 6 AX201 2x2 AX Bluetooth® 5.1 or above
Serial Port	1xRS232, 1x RS 232/422/485
Audio	
Audio Interface	OnBoard
I/O	1x Audio-out 3.5 mm

¹ Supports camera based projector alignment; for supported cameras see <https://docs.vioso.com/preparation/camera>

Product Options

Anystation Pico

AP1-2

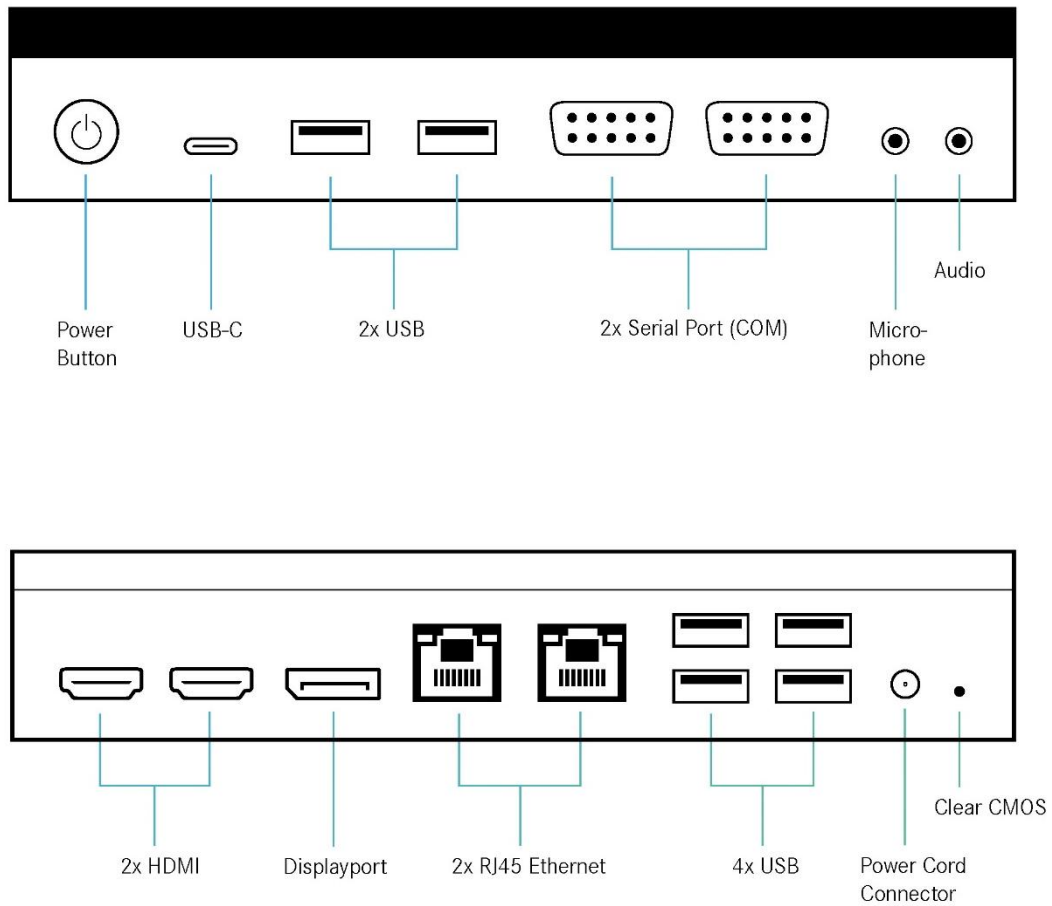

VIOSO®

VIOSO GmbH | Ronsdorfer Straße 77a | 40233 Düsseldorf | Germany
info@vioso.com | www.vioso.com